

1.25mm Center Wire-to-Board System



1230 Series

■ HOUSING PART NO: 1230H


- Material: Nylon 66,UL94V-0
- Pitch: 1.25mm
- Poles: 2~15
- Accepts Terminal: 1230PS-2
- Accepts Wafer: 1231WS/1231WR

SPECIFICATIONS

- Rated Voltage: 100V AC, DC
- Rated Current: 1A
- Withstand Voltage: 800V AC/minute
- Insulation Resistance: 1,000M Ω min
- Temperature Range: -25°~85°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia: $\varnothing 0.5\text{mm} \pm 0.05$

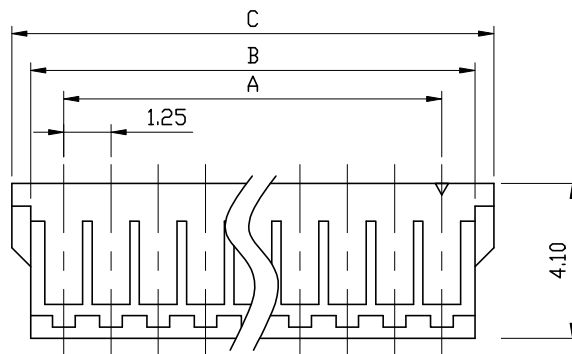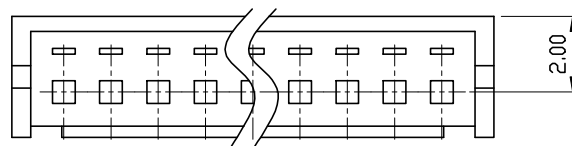

CIRCUITS	PART NO.	DIMENSION		
		A	B	C
2	1230H-02	1.25	3.00	4.00
3	1230H-03	2.50	4.25	5.25
4	1230H-04	3.75	5.50	6.50
5	1230H-05	5.00	6.75	7.75
6	1230H-06	6.25	8.00	9.00
7	1230H-07	7.50	9.25	10.25
8	1230H-08	8.75	10.50	11.50
9	1230H-09	10.00	11.75	12.75
10	1230H-10	11.25	13.00	14.00
11	1230H-11	12.50	14.25	15.25
12	1230H-12	13.75	15.50	16.50
13	1230H-13	15.00	16.75	17.75
14	1230H-14	16.25	18.00	19.00
15	1230H-15	17.50	19.25	20.25

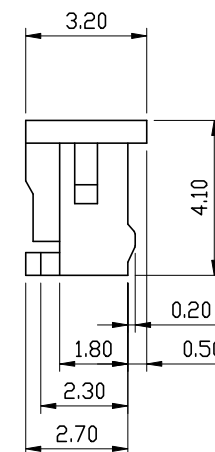

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定内容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	1230H	APPROVED BY / 核准	
			METERIAL / 材質		CHECKED BY / 審查	
			TREATMENT / 表面處理		DRAWN / 製圖	
			CUSTOMER / 客戶名稱		DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/2
					DRAWING TYPE / 圖面種類	