

# 2.54mm F.P.C. CONNECTOR Housing

# HOUSING PART NO:3816H

Material:

Material:NYlon66,UL 94V-0

Pole : 2~28P

Accepts Terminal : 3808PS-XX

## SPECIFICATIONS






Current rating: 2A AC, DC

Voltage rating: 250V AC, DC

Temperature range:-25°C~+85°C

Insulation resistance:1000m min

N	DIM	A	B	N	DIM	A	B
2P		5.08	2.54	16P		40.64	38.10
3P		7.62	5.08	17P		43.18	40.64
4P		10.16	7.62	18P		45.72	43.18
5P		12.70	10.16	19P		48.26	45.72
6P		15.24	12.70	20P		50.80	48.26
7P		17.78	15.24	21P		53.34	50.80
8P		20.32	17.78	22P		55.88	53.34
9P		22.86	20.32	23P		58.42	55.88
10P		25.40	22.86	24P		60.96	58.42
11P		27.94	25.40	25P		63.50	60.96
12P		30.48	27.94	26P		66.04	63.50
13P		33.02	30.48	27P		68.58	66.04
14P		35.56	33.02	28P		71.12	68.58
15P		38.10	35.56				

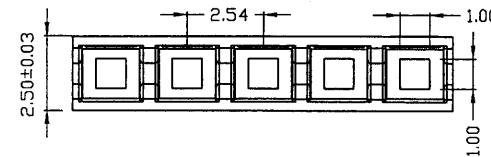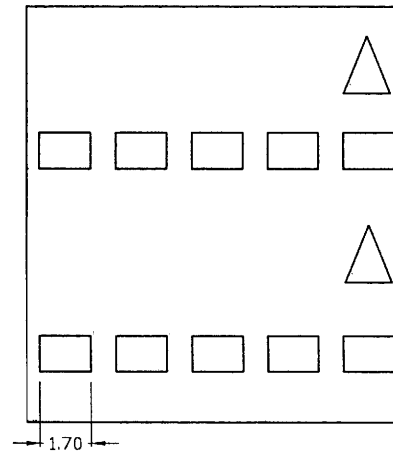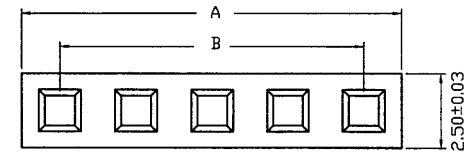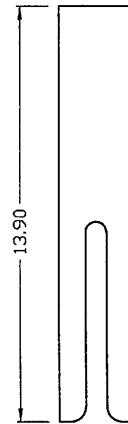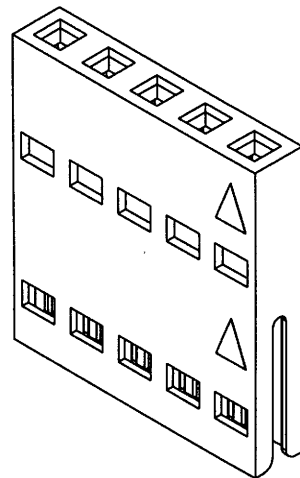

 HO TIEN PRECISION INDUSTRY CO., LTD. 和田精密股份有限公司				PART NO./料號		APPROVED BY/核准	
RECORD OF REVISION/修定內容	REV.BY/修定者	REV.DATE/修定日期	版別	3816H		 2010.10.01	
				MATERIAL/材質		CHECKED BY/審查	
				TREATMENT/表面處理		DRAWN/製圖	
				CUSTOMER/客戶品名		DATE/製圖日期	
			A-1	UNIT/單位	mm	SCALE/比例	1:1
				DRAWING TYPE/圖面種類		邱正義 2010"09.29	