

2.54mm F.P.C. Housing

HOUSING PART NO:3823H

Material:

Material:PA66-94V-0+30%Glass Fiber

Pitch : 2.54mm

Pole : 2~26

Accepts Terminal : 3803PS

SPECIFICATIONS

Current rating: 3A AC, DC


Voltage rating: 1000V AC, DC

Current resistance: 20m Ω max

Insulation resistance:1,000m Ω min

Temperature range:-55°C~+150°C

Mates with male and female contacts

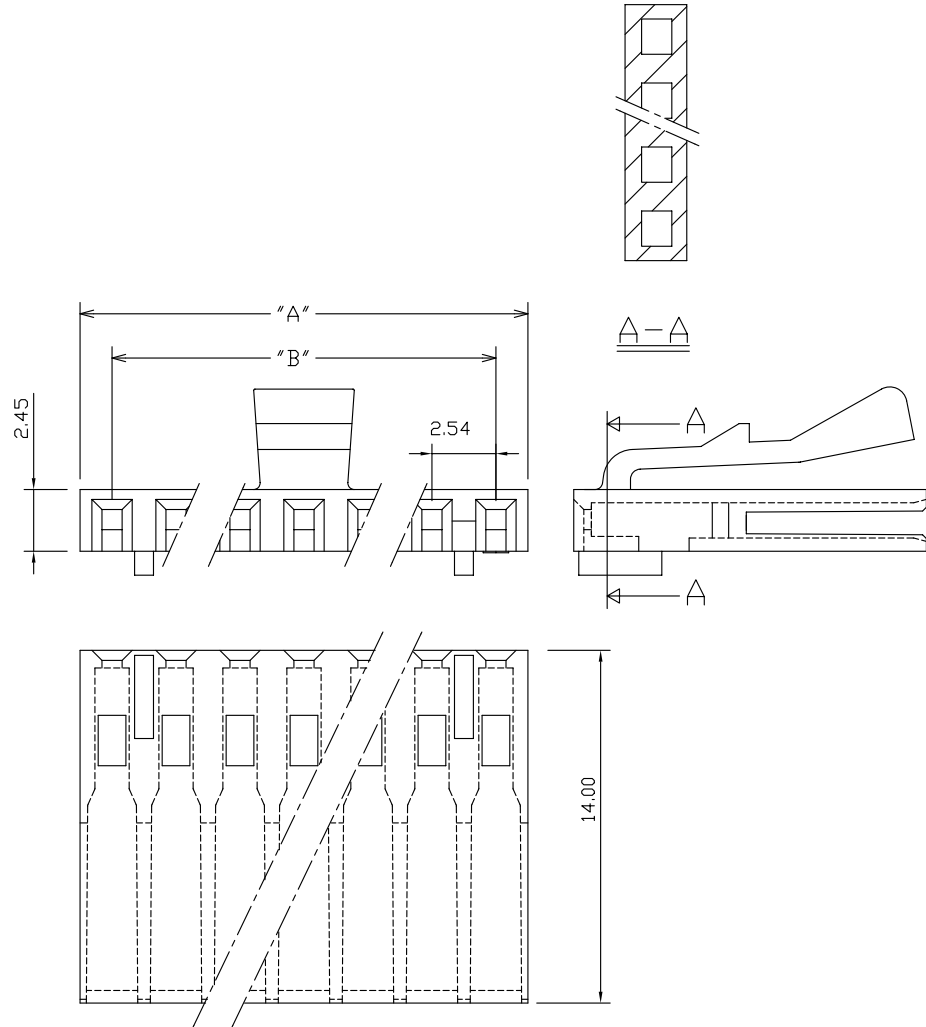

(F 尺寸參照圖)

PART NO	POSITION	"A"	"B"
3823-02	2 P	5.08	2.54
3823-03	3 P	7.62	5.08
3823-04	4 P	10.16	7.62
3823-05	5 P	12.70	10.16
3823-06	6 P	15.24	12.70
3823-07	7 P	17.78	15.24
3823-08	8 P	20.32	17.78
3823-09	9 P	22.86	20.32
3823-10	10 P	25.40	22.86
3823-11	11 P	27.94	25.40
3823-12	12 P	30.48	27.94
3823-13	13 P	33.02	30.48
3823-14	14 P	35.56	33.02
3823-15	15 P	38.10	35.56
3823-16	16 P	40.64	38.10
3823-17	17 P	43.18	40.64
3823-18	18 P	45.72	43.18
3823-19	19 P	48.26	45.72
3823-20	20 P	50.80	48.26
3823-21	21 P	53.34	50.80
3823-22	22 P	55.88	53.34
3823-23	23 P	58.42	55.88
3823-24	24 P	60.96	58.42
3823-25	25 P	63.50	60.96
3823-26	26 P	66.04	63.50



HO TIEN PRECISION INDUSTRY CO., LTD.

和田精密股份有限公司

RECORD OF REVISION/ 修定內容	REV.BY/ 修定者	REV.DATE/ 修定日期	版 別	PART NO./ 料號	3823H		APPROVED BY/ 核准	
				MATERIAL/ 材質			CHECKED BY/ 審查	
				TREATMENT/ 表面處理			DRAWN/ 製圖	STONE
				CUSTOMER/ 客戶品名			DATE/ 製圖日期	2012.08.05
			A-1	UNIT/ 單位	mm	SCALE/ 比例	1:1	DRAWING TYPE/ 圖面種類