

圖 面 標 準 格 式

1.27mm F.P.C. Housing

HOUSING PART NO:3852H

Material:

Material:Nylon 66,UL 94V-0

Pole : 2~28P

Accepts Terminal : 3842PS-XX



SPECIFICATIONS

Current rating: 2A AC, DC





Voltage rating: 250V AC, DC

Temperature range:-25°C~+85°C

Insulation resistance:1000m Ω min

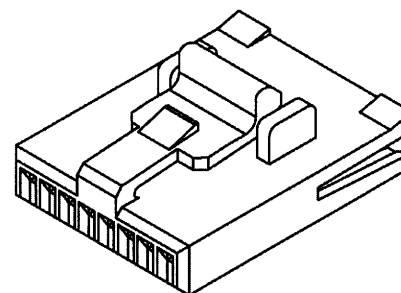

POSITION	"A"	"B"	POSITION	"A"	"B"
1 P	0	2.34	15 P	17.78	20.12
2 P	1.27	3.61	16 P	19.05	21.39
3 P	2.54	4.88	17 P	20.32	22.66
4 P	3.81	6.15	18 P	21.59	23.93
5 P	5.08	7.42	19 P	22.86	25.20
6 P	6.35	8.69	20 P	24.13	26.47
7 P	7.62	9.96	21 P	25.40	27.74
8 P	8.89	11.23	22 P	26.67	29.01
9 P	10.16	12.50	23 P	27.94	30.28
10 P	11.43	13.77	24 P	29.21	31.55
11 P	12.70	15.04	25 P	30.48	32.82
12 P	13.97	16.31	26 P	31.75	34.09
13 P	15.24	17.58	27 P	33.02	35.36
14 P	16.51	18.85	28 P	34.29	36.63

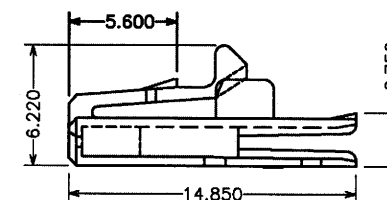

HO TIEN PRECISION INDUSTRY CO., LTD.
和 田 精 密 股 份 有 限 公 司

RECORD OF REVISION/修定內容	REV.BY/修定者	REV.DATE/修定日期	版別	PART NO./料號	3852H	APPROVED BY/核准	
				MATERIAL/材質		CHECKED BY/審查	
				TREATMENT/表面處理		DRAWN/製圖	邱正義
				CUSTOMER/客戶品名		DATE/製圖日期	2010.09.27
			A-1	UNIT/單位	mm	SCALE/比例	1:1
						DRAWING TYPE/圖面種類	