

4.2mm Center Wire-to-Wire/Board





4200 Series

■ HOUSING PART NO: 4200H

- Material: Nylon 66, UL 94V-2
- Pitch: 4.2mm
- Poles: 2x1~2x12
- Accepts Terminal: 3730PS-2/3730A-PS-2
- Accepts Wafer: 4201WR/4202WR
4211W / 4212W

SPECIFICATIONS

- Rated Voltage: 250V AC, DC
- Rated Current: 5A
- Withstand Voltage: 800V AC / minute
- Insulation Resistance: 1,000M Ω min
- Temperature Range: -25~85°C
- Applicable P.C.B. Thickness: 1.6mm
- Applicable P.C.B. Hole dia.: $\varnothing 1.75\text{mm} \pm 0.05$

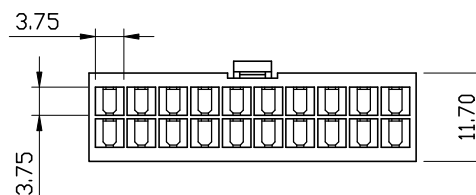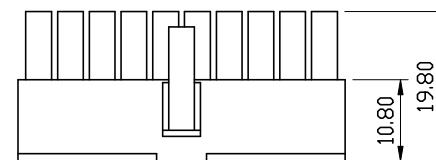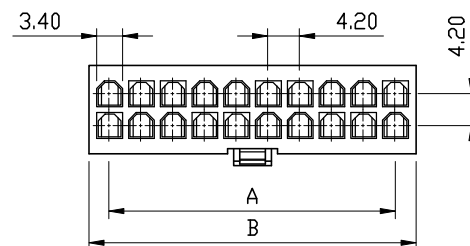

CIRCUITS	PART NO.	DIMENSION		CIRCUITS	PART NO.	DIMENSION	
		A	B			A	B
2	4200H-2X1	-	5.50	14	4200H-2X7	25.20	30.70
4	4200H-2X2	4.20	9.70	16	4200H-2X8	29.40	34.90
6	4200H-2X3	8.40	13.90	18	4200H-2X9	33.60	39.10
8	4200H-2X4	12.60	18.10	20	4200H-2X10	37.80	43.30
10	4200H-2X5	16.80	22.30	22	4200H-2X11	42.00	47.50
12	4200H-2X6	21.00	26.50	24	4200H-2X12	46.20	51.70

HO TIEN PRECISION INDUSTRY CO., LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定内容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	4200H	APPROVED BY / 核准	
			METERIAL / 材質		CHECKED BY / 審查	
			TREATMENT / 表面處理		DRAWN / 製圖	
			CUSTOMER / 客戶名稱		DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/10
					DRAWING TYPE / 圖面種類	