

2.54x2.54mm Pin Header (Right Angle, Thru-Hole)

■ HEADER PART NO: 6012R

Features & Benefits






- Side and stackable on unbroken edges
- Available in single, dual, and triple row
- Notches for easy break-off
- Standoffs facilitate post soldering clean
- Also, we accept different various type of specifications of Pin Header

Specification

- Current Rating: 3Amp
- Insulation: 5000M Ω Min
- Dielectric Withstanding: 600V AC
- Contact Resistance: 20m Ω Max.
- Operating Temperature: - 40°C to +105°C

Materials (UL 94V-0)

- Contact Material: Brass
- Contact Plating: Gold/Tin over Nickel
- Insulation Material: Glass Filled Polyester

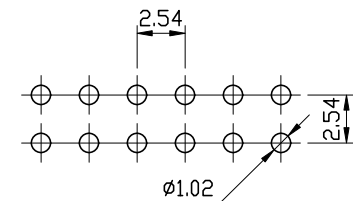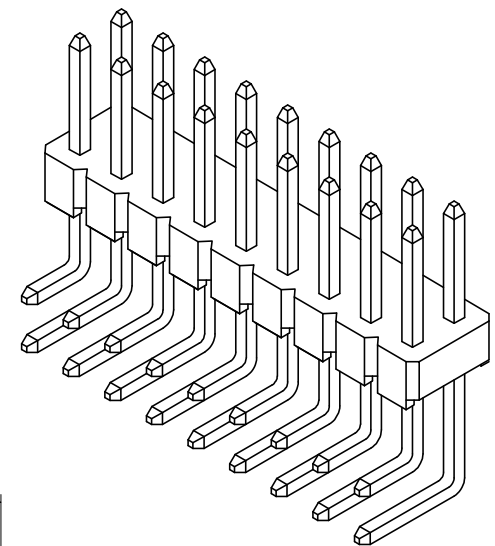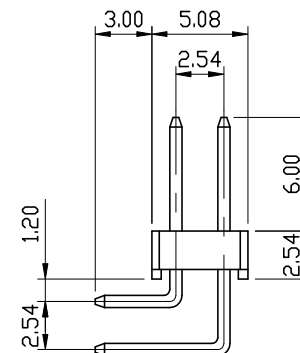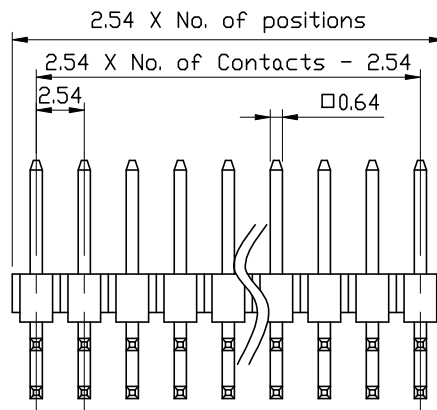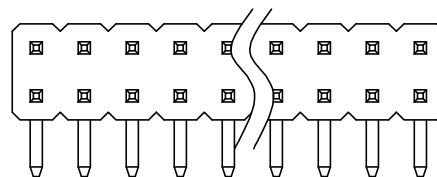

P.C. Board Hole Layout

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

RECORD OF REVISION/修定内容	REV.BY/修定者	REV. DATE/修定日期	PART NO./型號	6012R	APPROVED BY/核淮	
			METERIAL/材質		CHECKED BY/審查	
			TREATMENT/表面處理		DRAWN/製圖	
			CUSTOMER/客戶名稱		DATE/製圖日期	
			UNIT/單位	mm	SCALE/比例	1/4
					DRAWING TYPE/圖面種類	