

2.54x2.54mm Pin Header for (Straight, Thru-Hole)

■ HEADER PART NO: 8002S

Features & Benefits






- Side and stackable on unbroken edges
- Available in single, dual, and triple row
- Notches for easy break-off
- Standoffs facilitate post soldering clean
- Also, we accept different various type of specifications of Pin Header
- Available in single, and dual row

Specification

- Current Rating: 3Amp
- Insulation: 5000M Ω Min.
- Dielectric Withstanding: 600V AC
- Contact Resistance: 20m Ω Max.
- Operating Temperature: - 40°C to +105°C

Materials (UL 94V-0)

- Contact Material: Brass
- Contact Plating: Gold/Tin over Nickel
- Insulation Material: Glass Filled Polyester

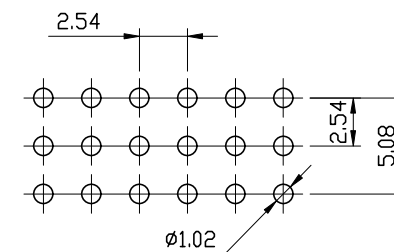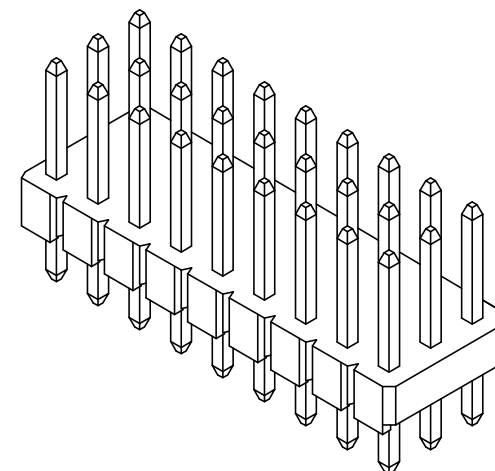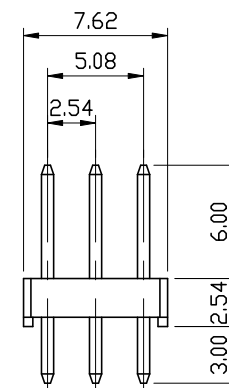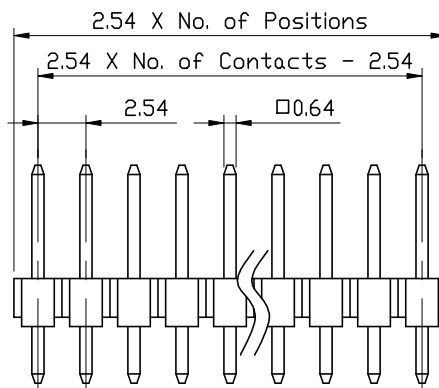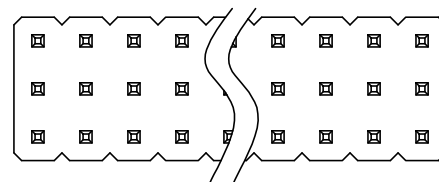

P.C. Board Hole Layout

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定内容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	8002S	APPROVED BY / 核准	
			METERIAL / 材質		CHECKED BY / 審查	
			TREATMENT / 表面處理		DRAWN / 製圖	
			CUSTOMER / 客戶名稱		DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/4
					DRAWING TYPE / 圖面種類	