

2.54mm Center Housing


Mine Latch Housing

■ HOUSING PART NO: 8532H

- Material: PBT, UL 94V-1
- Pitch: 2.54mm
- Poles: 4~40, Double row
2.54mm×2.54mm
- Accepts Terminal: 3701BS-2
- Accepts Polarizing Key: 8530-1 Key




POLES	PART NO.	DIM. A	POLES	PART NO.	DIM. A	POLES	PART NO.	DIM. A
4	8532H-02	5.08	30	8532H-15	38.10	56	8532H-28	71.12
6	8532H-03	7.62	32	8532H-16	40.64	58	8532H-29	73.66
8	8532H-04	10.16	34	8532H-17	43.18	60	8532H-30	76.20
10	8532H-05	12.70	36	8532H-18	45.72	62	8532H-31	78.74
12	8532H-06	15.24	38	8532H-19	48.26	64	8532H-32	81.28
14	8532H-07	17.78	40	8532H-20	50.80	66	8532H-33	83.82
16	8532H-08	20.32	42	8532H-21	53.34	68	8532H-34	86.36
18	8532H-09	22.86	44	8532H-22	55.88	70	8532H-35	88.90
20	8532H-10	25.40	46	8532H-23	58.42	72	8532H-36	91.44
22	8532H-11	27.94	48	8532H-24	60.96	74	8532H-37	93.98
24	8532H-12	30.48	50	8532H-25	63.50	76	8532H-38	96.52
26	8532H-13	33.02	52	8532H-26	66.04	78	8532H-39	99.06
28	8532H-14	35.56	54	8532H-27	68.58	80	8532H-40	101.60

■ KEY PART NO: 8530-1

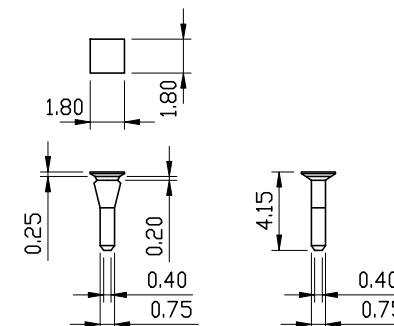

SPECIFICATIONS

- Current rating: 3A AC, DC
- Voltage rating: 250V AC, DC
- Temperature range: -25°C~+85°C
(Including temperature rise)
- Contact resistance: Initial value/10m Ω max.
After environmental
testing/30m Ω max
- Insulation resistance: 500m Ω min
- Withstand voltage: 1,000V AC/minute
- Applicable Wire: AWG #24-26

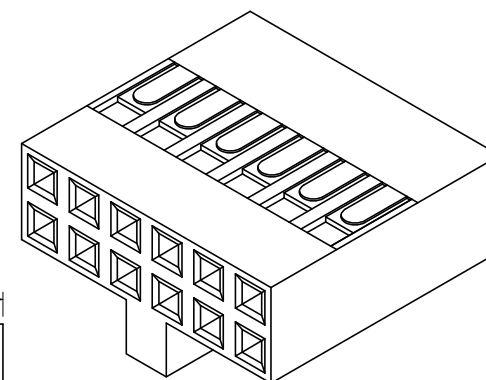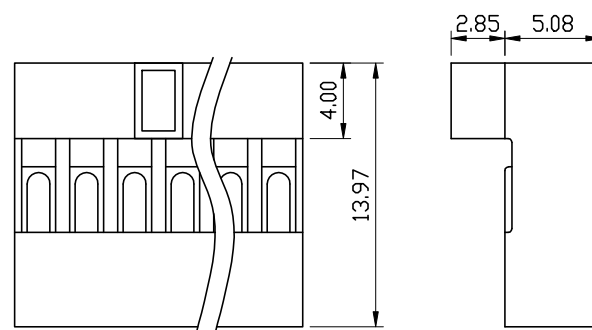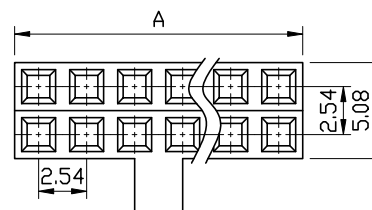

HO TIEN PRECISION INDUSTRY CO., LTD.
合田精密工業股份有限公司

RECORD OF REVISION/修定内容	REV.BY/修定者	REV. DATE/修定日期	PART NO./型號	8532H	APPROVED BY/核准
			METERIAL/材質		CHECKED BY/審查
			TREATMENT/表面處理		DRAWN/製圖
			CUSTOMER/客戶名稱		DATE/製圖日期
			UNIT/單位	mm	SCALE/比例
				1/4	DRAWING TYPE/圖面種類