




## 2.54mm Center Housing

HOUSING PART NO: 8910H

- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Single row 2-36P
- Accepts Terminal: 3717S/3717L

### SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C  
(including temperature rise)
- Contact Resistance: Initial Value / 10M  $\Omega$  Max.  
After environmental  
testing/30M  $\Omega$  Max.
- Insulation Resistance: 500M  $\Omega$  Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

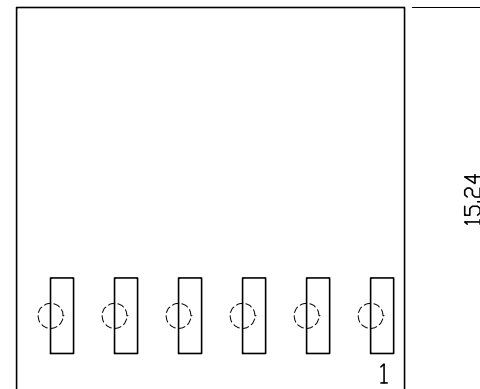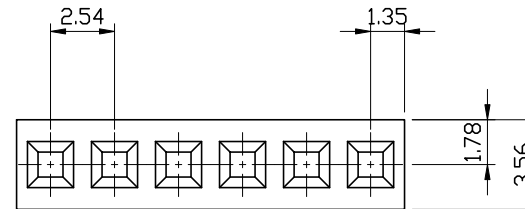

HO TIEN PRECISION INDUSTRY CO.,LTD.  
合田精密工業股份有限公司

RECORD OF REVISION / 修定内容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	8910H	APPROVED BY / 核准	
			METERIAL / 材質		CHECKED BY / 審查	
			TREATMENT / 表面處理		DRAWN / 製圖	
			CUSTOMER / 客戶名稱		DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/3
					DRAWING TYPE / 圖面種類	