




2.54mm Center Housing

HOUSING PART NO: 9910H

- Material: Nylon 66, UL 94V-1
- Pitch: 2.54mm
- Poles: Double row 4-80P
- Accepts Terminal: 3717S/3717L

SPECIFICATIONS

- Current Rating: 3A AC,DC
- Voltage Rating: 250V AC,DC
- Temperature Range: -25°C~+85°C
(including temperature rise)
- Contact Resistance: Initial Value / 10M Ω Max.
After environmental
testing/30M Ω Max.
- Insulation Resistance: 500M Ω Min.
- Withstanding Voltage: 1000V AC/minute
- Applicable Wire: AWG#24-26

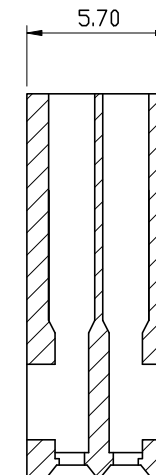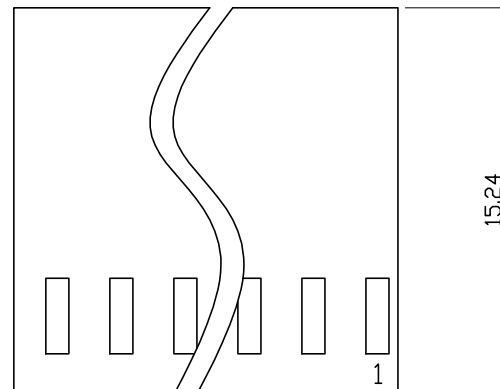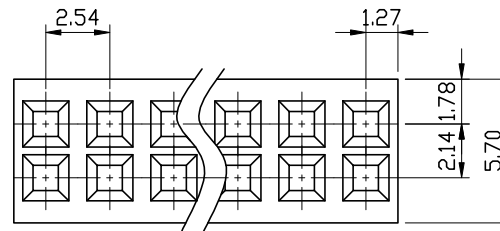

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

| | | | | | | |
|---------------------------|--------------|------------------|------------------|-------|---------------------|-----|
| RECORD OF REVISION / 修定内容 | REV.BY / 修定者 | REV. DATE / 修定日期 | PART NO. / 型號 | 9910H | APPROVED BY / 核准 | |
| | | | METERIAL / 材質 | | CHECKED BY / 審查 | |
| | | | TREATMENT / 表面處理 | | DRAWN / 製圖 | |
| | | | CUSTOMER / 客戶名稱 | | DATE / 製圖日期 | |
| | | | UNIT / 單位 | mm | SCALE / 比例 | 1/3 |
| | | | | | DRAWING TYPE / 圖面種類 | |