




I-M-XXPIN Series

PART NO: I-M-XX-N

- Material:
Insulator: P.B.T. 30%Glass Fiber, UL94V-0
Color: Black, Yellow, Red, Blue, Green,
Gray, White, Orange
Contacts: Brass, Phos. Bronze,
Gold Flash Over Nickel
- Pitch: 2.54mm

SPECIFICATIONS

- Current Rating: 1A AC/DC
- Insulation Resistance: 1,000 mΩ min
- Withstand Voltage: 500V AC/min
- Temperature Range: -55° C~+105° C

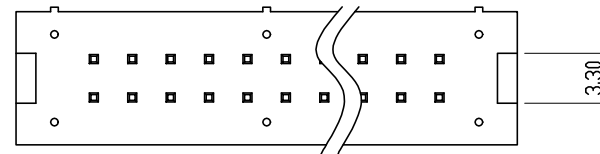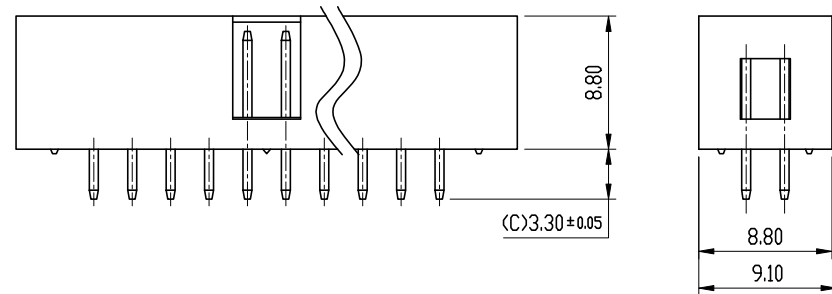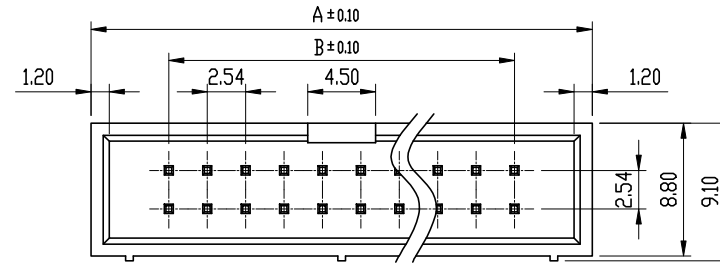

CIRCUITS	PART NO.	DIMENSION			CIRCUITS	PART NO.	DIMENSION		
		A	B	C			A	B	C
6	I-M-06-N	15.06	5.08	3.3	26	I-M-26-N	40.50	30.48	3.3
8	I-M-08-N	17.90	7.62	3.3	30	I-M-30-N	46.00	35.56	3.3
10	I-M-10-N	20.14	10.16	3.3	34	I-M-34-N	50.70	40.64	3.3
12	I-M-12-N	22.67	12.70	3.3	40	I-M-40-N	58.30	48.26	3.3
14	I-M-14-N	25.22	15.24	3.3	44	I-M-44-N	63.78	53.34	3.3
16	I-M-16-N	27.80	17.78	3.3	50	I-M-50-N	71.05	60.96	3.3
20	I-M-20-N	32.68	22.86	3.3	60	I-M-60-N	84.10	73.66	3.3
24	I-M-24-N	38.32	27.94	3.3	64	I-M-64-N	89.25	78.74	3.3

HO TIEN PRECISION INDUSTRY CO., LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定內容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	I-M-XX-N	APPROVED BY / 核准	
			METERIAL / 材質		CHECKED BY / 審查	
			TREATMENT / 表面處理		DRAWN / 製圖	
			CUSTOMER / 客戶名稱		DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/5
					DRAWING TYPE / 圖面種類	