


2.0mm Connector Pin Header

■ HEADER PART NO:N-XX

- Material:
Contact Pin: Brass, Copper-undercoated, Tin Plated
Base: Nylon 66,UL 94V-0,Ivory
- Pitch: 2.0mm
- Poles: 2~16
- Mates with: PH-XX

SPECIFICATIONS

- Voltage: 250V AC, DC
- Current: 2A AC,DC
- Withstand Voltage: 800V AC/minute
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/
20mΩ max
- Temperature Range: -25°C ~85°C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: Ø0.8mm±0.05

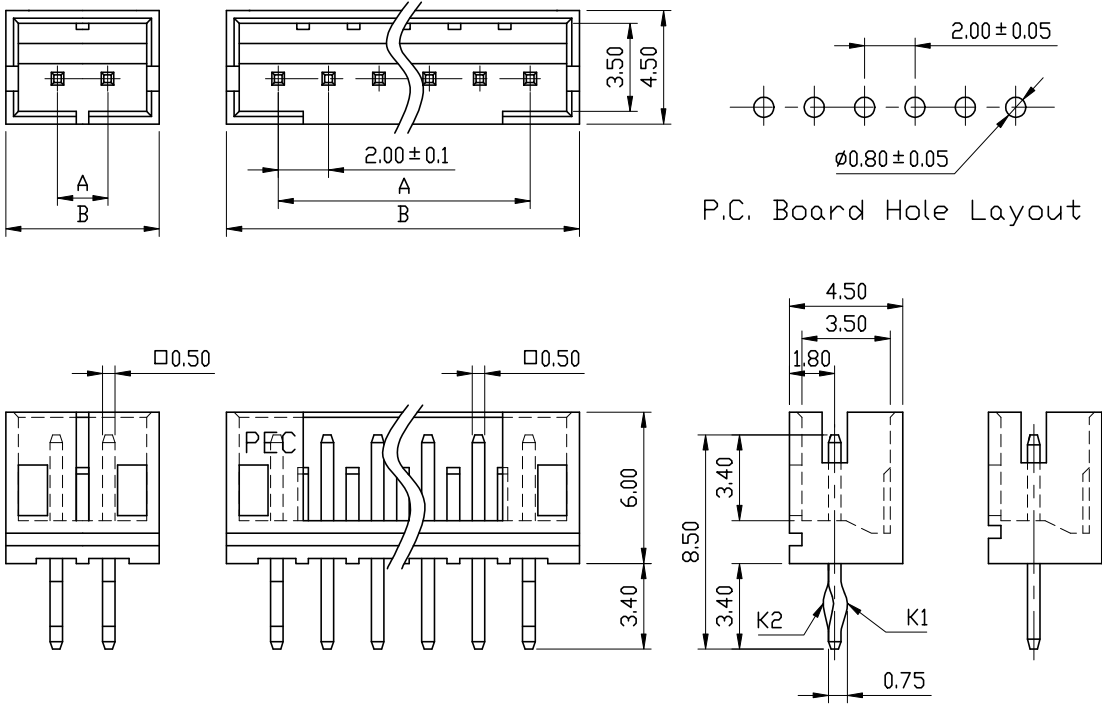

CIRCUITS	PART NO.	DIMENSION		CIRCUITS	PART NO.	DIMENSION	
		A	B			A	B
2	N-02	2.00	5.80	10	N-10	18.00	21.80
3	N-03	4.00	7.80	11	N-11	20.00	23.80
4	N-04	6.00	9.80	12	N-12	22.00	25.80
5	N-05	8.00	11.80	13	N-13	24.00	27.80
6	N-06	10.00	13.80	14	N-14	26.00	29.80
7	N-07	12.00	15.80	15	N-15	28.00	31.80
8	N-08	14.00	17.80	16	N-16	30.00	33.80
9	N-09	16.00	19.80				

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

RECORD OF REVISION/修定内容	REV.BY/修定者	REV. DATE/修定日期	PART NO./型號	N-XX		APPROVED BY/核准	
			METERIAL/材質			CHECKED BY/審查	
			TREATMENT/表面處理			DRAWN/製圖	
			CUSTOMER/客戶名稱			DATE/製圖日期	
			UNIT/單位	mm	SCALE/比例	1/3	DRAWING TYPE/圖面種類