


2.0mm Connector Pin Header

■ HEADER PART NO:R-XX

- Material:
Contact Pin: Brass, Copper-undercoated, Tin Plated
Base: Nylon 66,UL 94V-0,Ivory
- Pitch: 2.0mm
- Poles: 2~16
- Mates with: PH-XX

SPECIFICATIONS

- Voltage: 250V AC, DC
- Current: 2A AC,DC
- Withstand Voltage: 800V AC/minute
- Contact Resistance: Initial value/10mΩ max.
After environmental testing/
20mΩ max
- Temperature Range: -25° C ~85° C
- Applicable P.C.B. Thickness: 0.8~1.6mm
- Applicable P.C.B. Hole dia.: Ø0.8mm±0.05

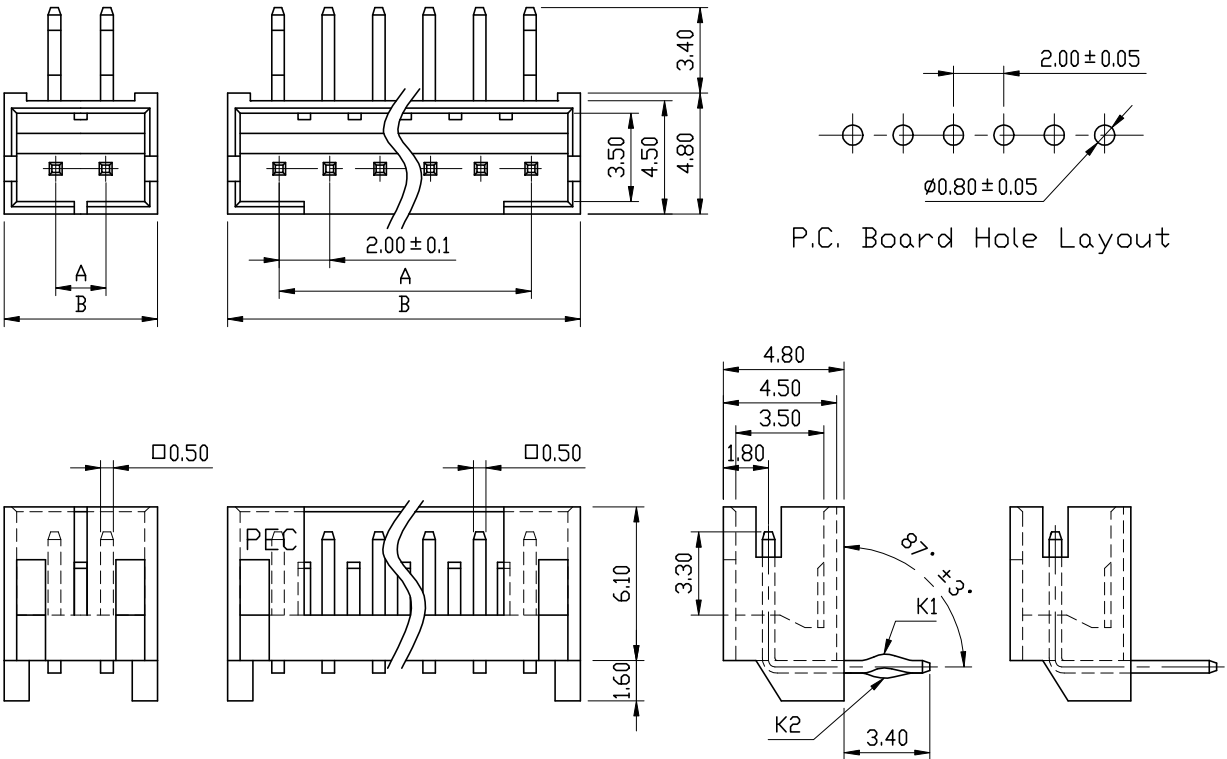

CIRCUITS	PART NO.	DIMENSION		CIRCUITS	PART NO.	DIMENSION	
		A	B			A	B
2	R-02	2.00	5.80	10	R-10	18.00	21.80
3	R-03	4.00	7.80	11	R-11	20.00	23.80
4	R-04	6.00	9.80	12	R-12	22.00	25.80
5	R-05	8.00	11.80	13	R-13	24.00	27.80
6	R-06	10.00	13.80	14	R-14	26.00	29.80
7	R-07	12.00	15.80	15	R-15	28.00	31.80
8	R-08	14.00	17.80	16	R-16	30.00	33.80
9	R-09	16.00	19.80				

HO TIEN PRECISION INDUSTRY CO.,LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定内容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號		R-XX		APPROVED BY / 核准	
			METERIAL / 材質				CHECKED BY / 審查	
			TREATMENT / 表面處理				DRAWN / 製圖	
			CUSTOMER / 客戶名稱				DATE / 製圖日期	
			UNIT / 單位	mm	SCALE / 比例	1/3	DRAWING TYPE / 圖面種類	