


TRANSITION PLUG

PART NO: D-P-XX

- Material:
Contact(stamp): Phosphor Bronze
Insulator: PBT & Glass-fibre reinforced
Nylon 66,UL94V-0
- Current Rating: 1AMP DC
- Contact Resistance:
30mΩ max at 6V DC 0.3A
- Insulation Resistance:
1,000mΩ min at 500V DC
- Dielectric With Standing Voltage:
500V AC of one minute
- Wire Size Flat Cable For 1DC:
1.27mm Spacing Awg #28~30

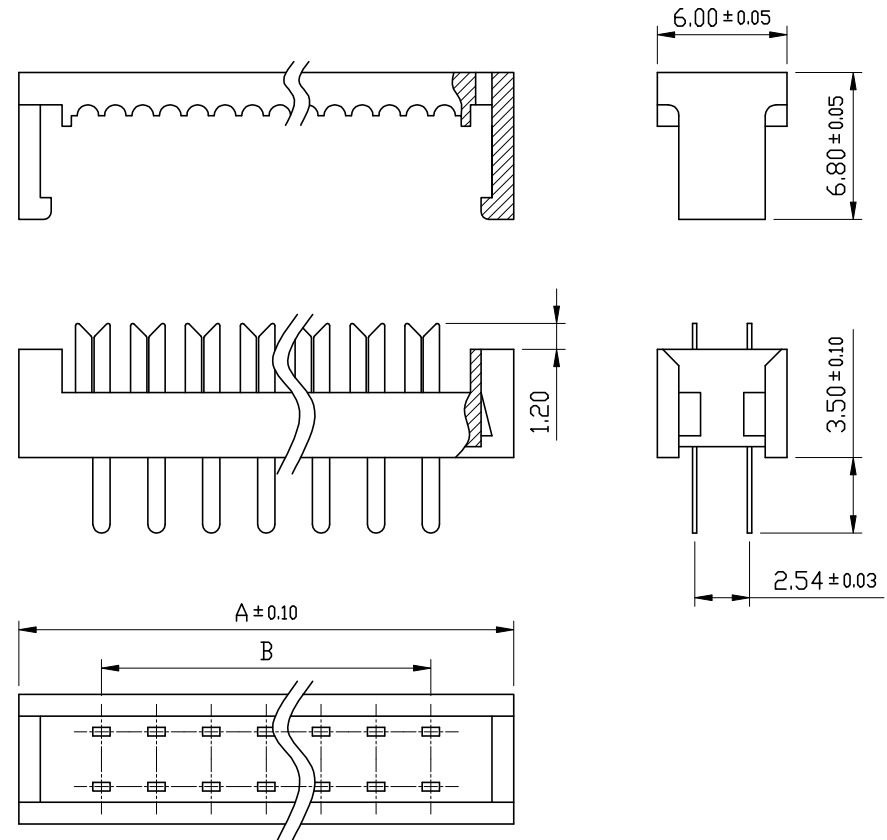

CIRCUITS	PART NO.	DIMENSION		CIRCUITS	PART NO.	DIMENSION	
		A	B			A	B
8	D-P-8	15.28	7.62	30	D-P-30	43.22	35.56
10	D-P-10	17.82	10.16	34	D-P-34	48.30	40.64
14	D-P-14	22.90	15.24	40	D-P-40	65.92	48.26
16	D-P-16	25.44	17.78	50	D-P-50	68.62	60.96
20	D-P-20	30.52	22.86	60	D-P-60	81.32	73.66
24	D-P-24	35.60	27.94	64	D-P-64	86.40	78.74
26	D-P-26	38.14	30.48				

HO TIEN PRECISION INDUSTRY CO., LTD.
合田精密工業股份有限公司

RECORD OF REVISION / 修定內容	REV.BY / 修定者	REV. DATE / 修定日期	PART NO. / 型號	D-P-XX	APPROVED BY / 核准
			MATERIAL / 材質		CHECKED BY / 審查
			TREATMENT / 表面處理		DRAWN / 製圖
			CUSTOMER / 客戶名稱		DATE / 製圖日期
			UNIT / 單位	mm	SCALE / 比例
				1/3.5	DRAWING TYPE / 圖面種類